



Best aid
SAFEMATE

ISO-9001:2008




VDHV-FB/FM

FMS COMPACT FLEXIBLE BALANCE GRIPPER JAW DOUBLE LOCK HYDRAULIC MACHINE VISE (LONG OPENING) FMS · 2 in 1 Hydraulic
FMS彈性化 / 肯倍得式薄式動平衡雙夾油壓虎鉗(大開口) 雙夾 / 動平衡油壓型

- MODEL · 11430160 VDHV-160V-L-FB · 11442200 VDHV-200V-L-FB · 11450160 VDHV-160V-L-FM · 11462200 VDHV-200V-L-FM
· 11432160 VDHV-160V-XL-FB · 11444200 VDHV-200V-XL-FB · 11452160 VDHV-160V-XL-FM · 11464200 VDHV-200 V-XL-FM
· 11440200 VDHV-200V-BL-FB · 11460200 VDHV-200V-BL-FM
(with FB-160A / 200A) x 1
(with FB-160B / 200B) x 2
(with FB-160C / 200C) x 2






DIMENSIONS/尺寸圖

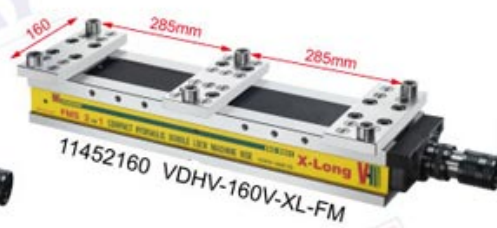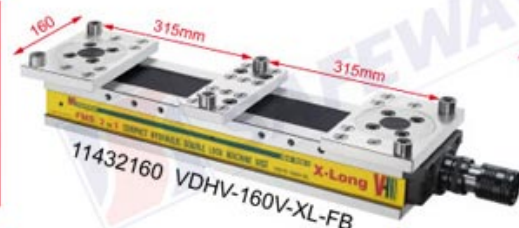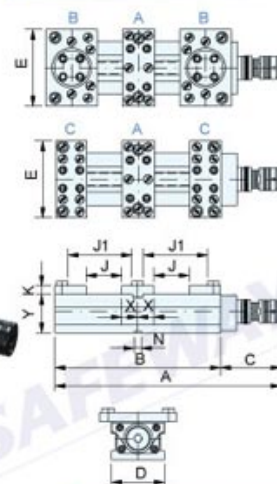

APPLICATION / 使用方法

1. First, install B workpiece.
先放B工件。
2. Second, install A workpiece.
再放A工件。
3. Finally, clamping A&B workpiece together by handle.
A&B兩工件放入後，把手同時夾緊。
4. A≥B=6 mm

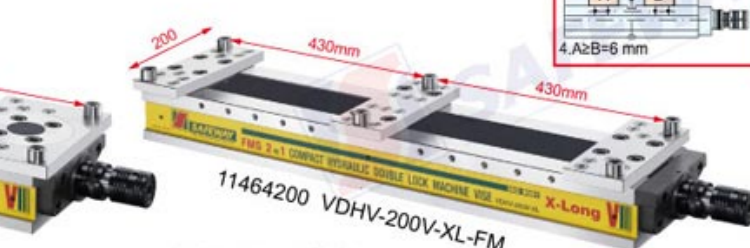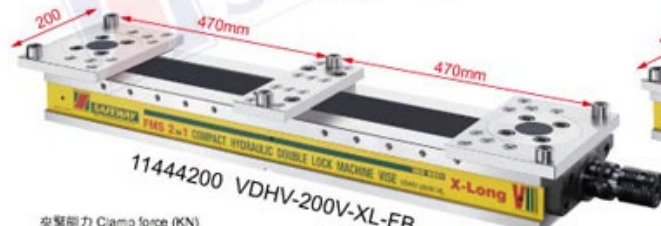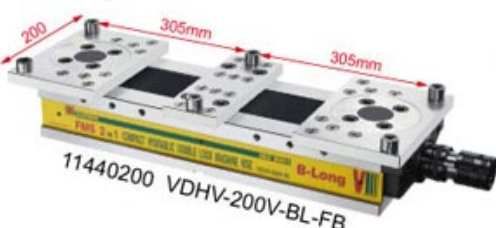

夾緊能力 Clamp force (KN)
0 50 100 KN

油壓夾緊，且一次可加工兩只不規則工件，適用於重切削加工。

Gripper sets ref.P22
千鳥爪參照P22

Unit: mm, kg

Order NO. 訂購編號	Model 型號	A	B	C	D	E	J	J1	K	N	X	Y	N.W. 淨重	G.W. 毛重	Limit. Pressure 最大夾緊力	Remark 備註
11430160	VDHV-160V-L-FB	771	590	150	161	220	125	265	22	18	44	105	73	77	45KN(4410kgf)	
11432160	VDHV-160V-XL-FB	871	690	150	161	220	175	315	22	18	44	105	79	83	45KN(4410kgf)	
11440200	VDHV-200V-BL-FB	845	655	150	201	260	130	305	22	18	51	110	105	116	50KN(4900kgf)	
11442200	VDHV-200V-L-FB	1025	835	150	201	260	220	395	22	18	51	110	123	143	50KN(4900kgf)	
11444200	VDHV-200V-XL-FB	1170	980	150	201	260	295	470	28	18	51	110	137	159	50KN(4900kgf)	
11450160	VDHV-160V-L-FM	740	590	150	161	220	160	235	22	18	44	105	71	75	45KN(4410kgf)	
11452160	VDHV-160V-XL-FM	840	690	150	161	220	210	285	22	18	44	105	77	81	45KN(4410kgf)	
11460200	VDHV-200V-BL-FM	805	655	150	201	260	170	270	22	18	51	110	103	114	50KN(4900kgf)	
11462200	VDHV-200V-L-FM	985	835	150	201	260	260	360	22	18	51	110	119	139	50KN(4900kgf)	
11464200	VDHV-200V-XL-FM	1130	980	150	201	260	335	430	28	18	51	110	133	155	50KN(4900kgf)	