



STRONG TAILSTOCK / 圓盤式尾座

- 30002170 MODEL: SRT-170F
- 30002217 MODEL: SRT-217F

- 30002256 MODEL: SRT-256F
- 30002322 MODEL: SRT-322F

FEATURES:

- Suitable for bridge device and heavy duty capacity.
- Rapid brake capacity torque.

特性:

- 適合搭配橋式設計重切削
- 本身有碟式煞車系統



SRT-170F
N.W.: 26 kg



SRT-217F
N.W.: 43 kg




SRT-256F
N.W.: 60.3 kg




SRT-322F
N.W.: 111 kg


SRT-170F

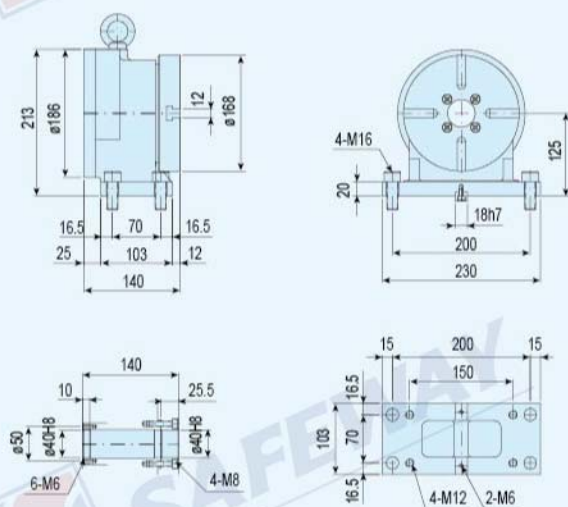


SRT-217F

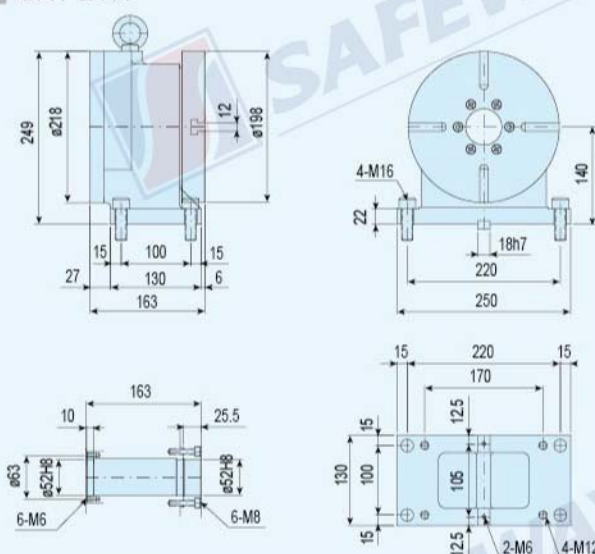

SRT-256F

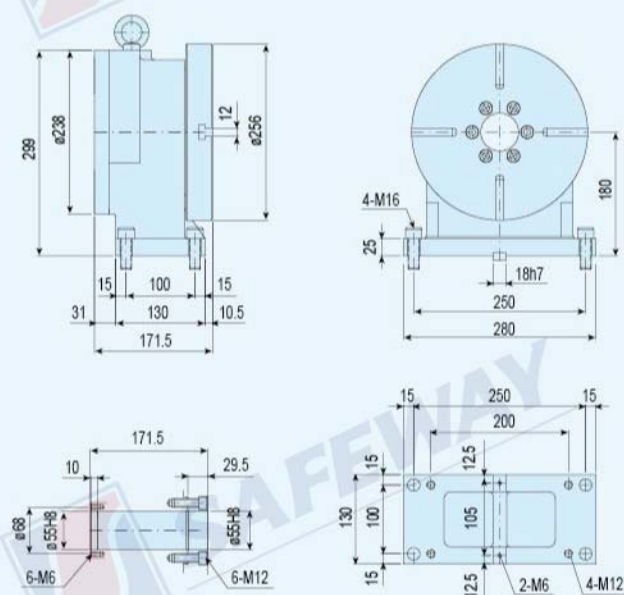

SRT-322F

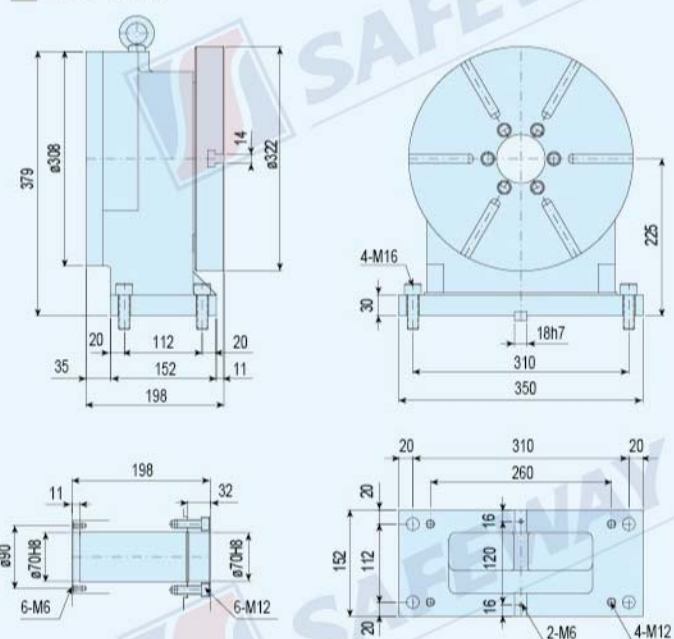



LIVE CENTER TAILSTOCK (MANUAL) / 頂針式尾座 (手動)

- 30004170 MODEL: SRT-170TM
- 30004217 MODEL: SRT-217TM
- 30004256 MODEL: SRT-256TM
- 30004322 MODEL: SRT-322TM



SRT-170TM
N.W.: 15 kg


SRT-217TM
N.W.: 18.5 kg




SRT-256TM
N.W.: 22.75 kg

SRT-322TM
N.W.: 25 kg


SRT-170TM

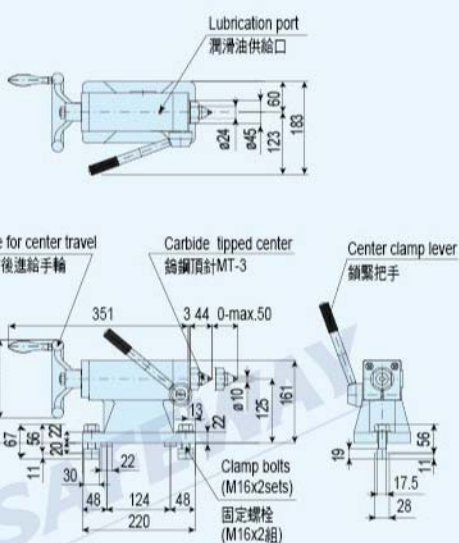


SRT-217TM

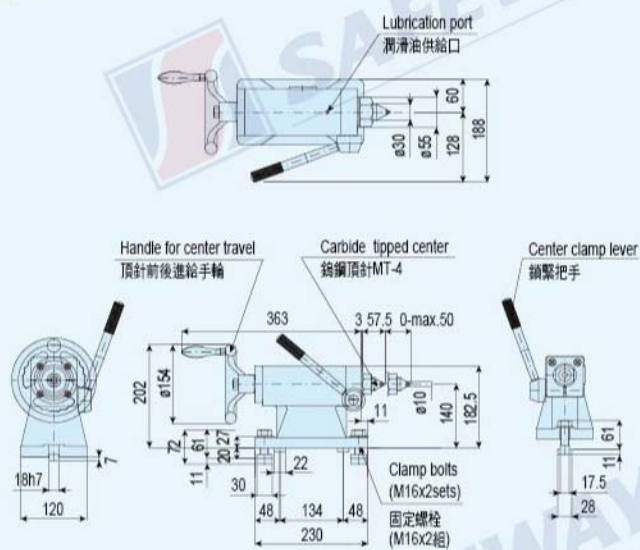

SRT-256TM

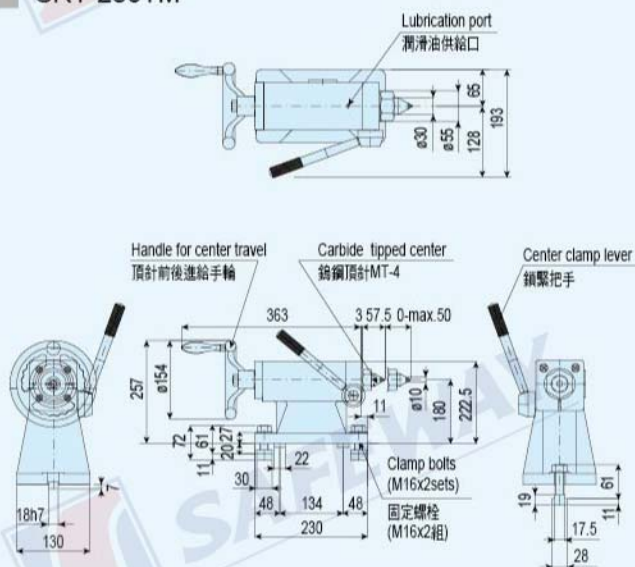

SRT-322TM

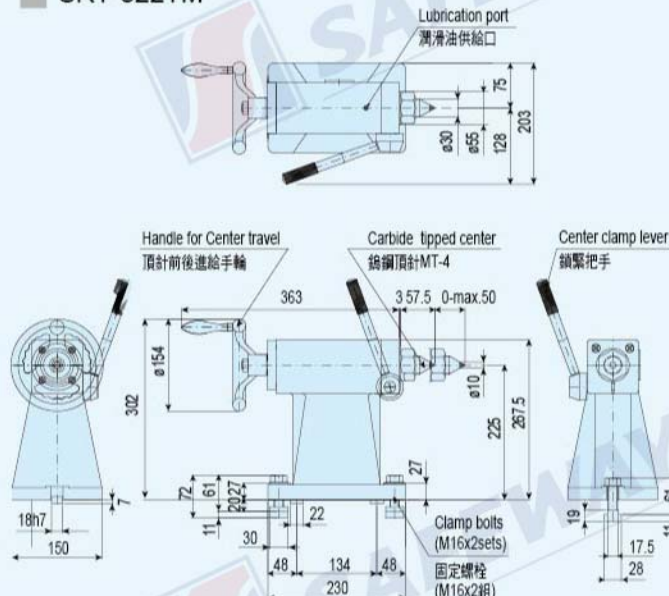



LIVE CENTER TAILSTOCK (PNEUMATIC) / 頂針式尾座 (氣壓)

- 30006170 MODEL: SRT-170TP
- 30006217 MODEL: SRT-217TP
- 30006256 MODEL: SRT-256TP
- 30006322 MODEL: SRT-322TP



SRT-170TP
N.W.: 16.5 kg


SRT-217TP
N.W.: 26 kg





SRT-256TP
N.W.: 30.25 kg

SRT-322TP
N.W.: 32.25 kg


SRT-170TP






SRT-217TP

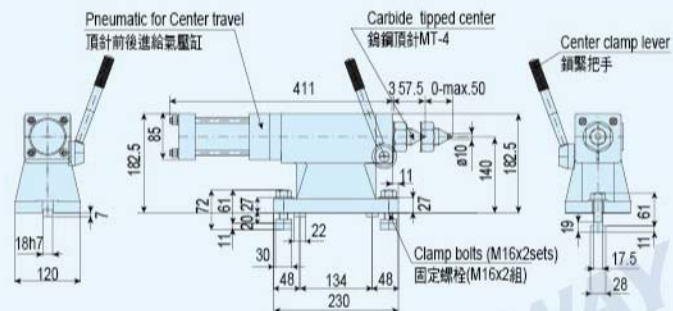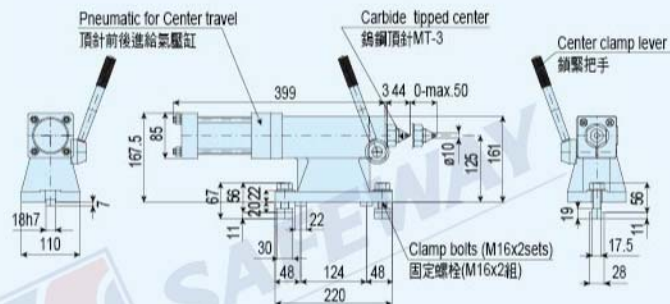

SRT-256TP

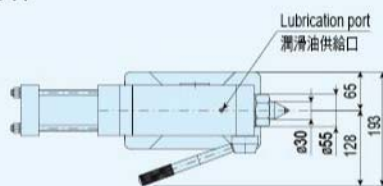

SRT-322TP

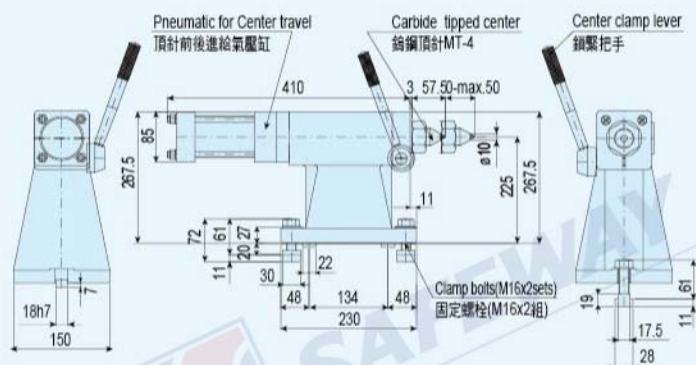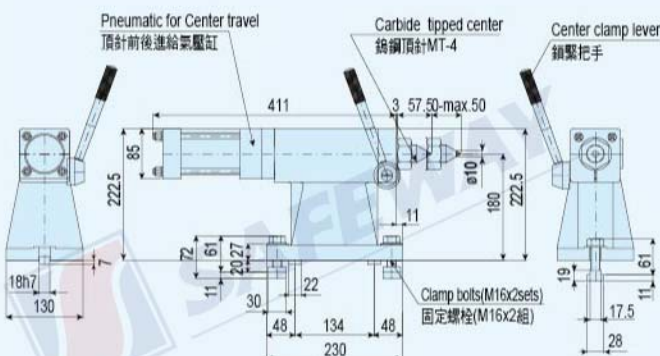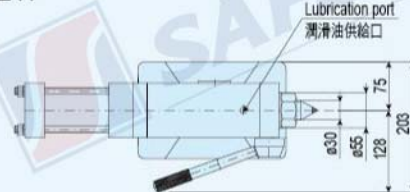



Best aid
SAFEWAY

ISO-9001

LIVE CENTER TAILSTOCK (HYDRAULIC) / 頂針式尾座 (油壓)

- 30008170 MODEL: SRT-170TH
- 30008217 MODEL: SRT-217TH
- 30008256 MODEL: SRT-256TH
- 30008322 MODEL: SRT-322TH




SRT-170TH
N.W.: 15.5 kg

SRT-217TH
N.W.: 25.75 kg



SRT-256TH
N.W.: 30kg

SRT-322TH
N.W.: 32.25 kg


SRT-170TH

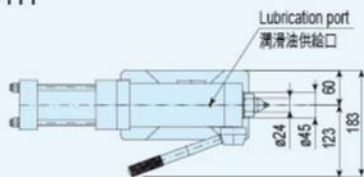




SRT-217TH

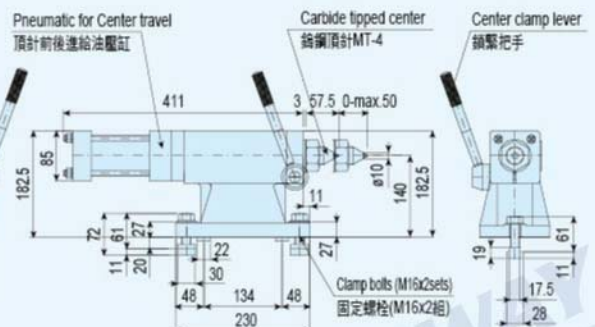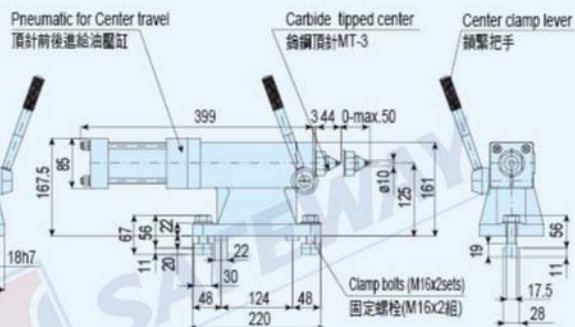

SRT-256TH

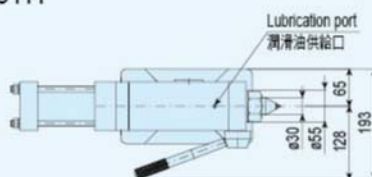

SRT-322TH

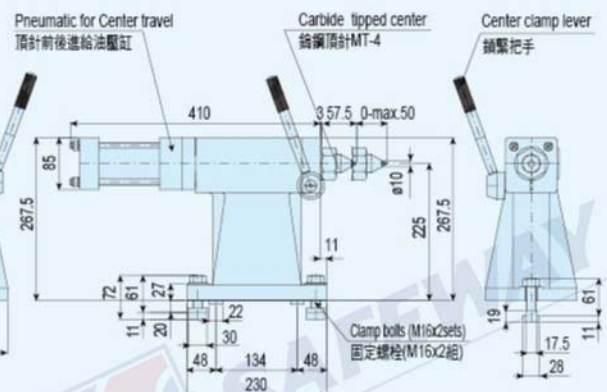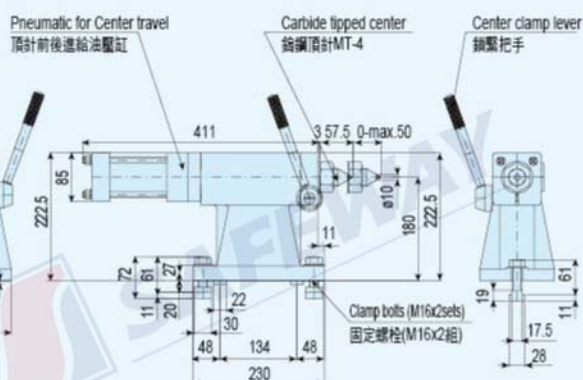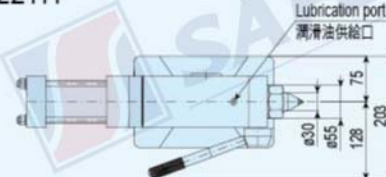




CHUCK & FLANGE / 法蘭片和夾頭

CHUCK / 夾頭

- 08132006 MODEL: SC-6
- 08132007 MODEL: SC-7
- 08132008 MODEL: SC-8
- 08132009 MODEL: SC-9
- 08132010 MODEL: SC-10
- 08132012 MODEL: SC-12



SRT-217

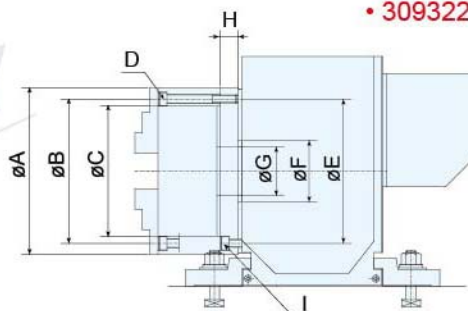

FLANGE / 法蘭片

- 30917006 MODEL: SRT-170SCF-06
- 30921706 MODEL: SRT-217SCF-06
- 30921707 MODEL: SRT-217SCF-07
- 30921708 MODEL: SRT-217SCF-08
- 30925607 MODEL: SRT-256SCF-07
- 30925609 MODEL: SRT-256SCF-09
- 30925610 MODEL: SRT-256SCF-10
- 30932209 MODEL: SRT-322SCF-09
- 30932210 MODEL: SRT-322SCF-10
- 30932212 MODEL: SRT-322SCF-12



FLANGE / 法蘭片

Chuck 夾頭	Flange 法蘭片	Chuck Size 夾頭尺寸	A	B	C	D	E	F	G	H	I	Chuck 夾頭	Flange 法蘭片	Remark 備註
SRT-170SC-06	SRT-170SCF-06	6"	167	147	130	M10	147	50	45	20	M10	7.9kg	3.5kg	
SRT-217SC-06	SRT-217SCF-06	6"	193	147	130	M10	147	75	45	22	M10	7.9kg	5.0kg	
SRT-217SC-07	SRT-217SCF-07	7"	193	172	155	M10	172	75	58	22	M10	12.0kg	5.0kg	
SRT-217SC-08	SRT-217SCF-08	8"	203	176	160	M10	176	75	58	22	M10	13.3kg	5.5kg	
SRT-256SC-07	SRT-256SCF-07	7"	232	172	155	M10	208	105	58	26	M10	12.0kg	8.5kg	
SRT-256SC-09	SRT-256SCF-09	9"	232	210	190	M12	208	105	70	26	M10	19.3kg	8.5kg	
SRT-256SC-10	SRT-256SCF-10	10"	273	250	230	M12	250	105	89	26	M10	26.2kg	11.0kg	
SRT-322SC-09	SRT-322SCF-09	9"	232	210	190	M12	208	135	70	26	M12	13.3kg	8.5kg	
SRT-322SC-10	SRT-322SCF-10	10"	273	250	230	M12	250	135	89	26	M12	19.3kg	11.0kg	
SRT-322SC-12	SRT-322SCF-12	12"	310	285	260	M12	285	135	105	26	M12	37.6kg	15.0kg	

INSPECTION / 精度檢查

